



## ULTRA-FAST DOUBLE GATE WITH ARTIFICIAL INTELLIGENCE FROM 4 TO 10 METRE CLEARANCE



Ultra-fast opening	Intelligent safety system with LBAi detect or safety edges and cells (optional)	Drive system and electronics integrated into the post	Complies with standard EN 13 241-1, approved by the CSTB
--------------------	---	---	--

### STANDARD CHARACTERISTICS

- **Passage width:** From 4 to 10 m
- **Continuous operation:** 6,000 cycles/day
- **Geared motor:** Drive system and electronics integrated into the post
- **Opening angle:** 90° (optional: 115°)
- **Post:** Technical post in cataphoresis treated steel + paint
- **Locking:** 500 kg electromagnet
- **Leaves:** (Frames and bars) in painted aluminium, polyester paint
- **Light signals:** Flash lights & area lighting
- **ONE-C control board comprising:** Power supply, PLC, frequency converter, SD card, RJ45 (Modbus) and torque limiter
- **LBAi Detect Intelligent Security System:** Artificial intelligence image analysis (optional)



## TECHNICAL SPECIFICATION

Power supply	230 V
Consumption	300 W
Geared motor	2 motors 0.09 kW negative brake
MTBF	6000
Maximum passage width	10 m
Height	2-2.5-3 m
Emergency operation	Brake release in posts
Temperature control	Thermostatically-controlled anti-condensation heating
Paint	250° polyester powder coating
Concrete Foundation dimensions (LxDxH)	600 x 600 x 800 mm
Operating temperature	-30° to +55° C
IP rating	55

## OPTIONS

### Customisation

- Choice of RAL colours
- Customisable leaves
- LBAi Detect: Customisable detection area depending on the site configuration and ensuring complete user safety
- Stylish aluminium sheet with LBA Design pattern


### Audible & visual signals

- LED strips
- Red/green R23 light on post

### Safety

- Infrared cells
- 2 infrared cell support posts
- Sensor bars to be mounted on the secondary door leaf
- Defensive anti-climb serrations

## INSTALLATION

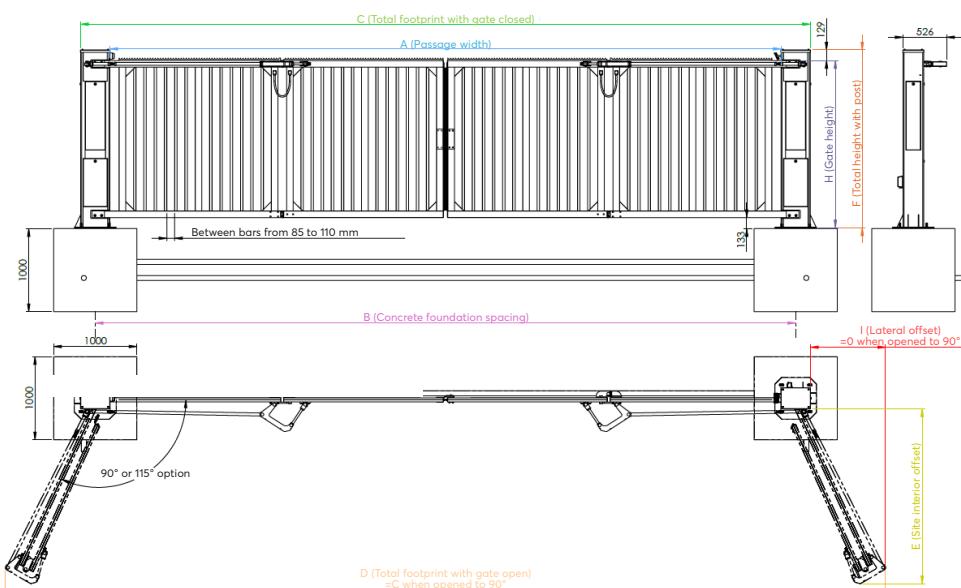

### Power supply:

- Ø63 mm corrugated conduit
- U-1000 RO 2V 3 x 2.5 mm<sup>2</sup> cable

### Remote control:

- Ø40 mm green corrugated conduit
- 5-pair 9/10 core telephone cable

### Connection between the 2 technical posts:

- Ø30 mm tube

### Magnetic loop cable:

- Ø30 mm tube
- Twisted pair loop cable

### Sealing template + 4 mounting rods

- The template remains level in situ and must rest entirely on the concrete foundation

