

SECURITY AUTOMATIC REVERSIBLE TYRE KILLER

LENGTH UP TO 5 m



Continuous and intensive operation

Integrated drive system in a technical compartment

Factory-tested and connected hydraulic circuit

Stand-alone or barrier-coupled operation

Modular in 50 cm increments

STANDARD CHARACTERISTICS

• Tyre killer:

- Automatic recessed tyre killer up to 5 m
- Withstands an axle load of 40 T
- Folded steel sheet casing housing the teeth and hydraulic unit

• Finishes:


- Mechanically welded steel tread plate with reinforcements
- RAL standard 1021 for the tread plate and 3020 for the teeth

• Operation:

- One-C PLC controlled: Power supply, PLC, Frequency converter, SD card, RJ45 (Modbus) and torque limiter
- Magnetic limit switches
- Compatible with all our barriers
- Built-in hydraulic drive system

• Installation:

- Nylon bearing-mounted tooth mounting shaft

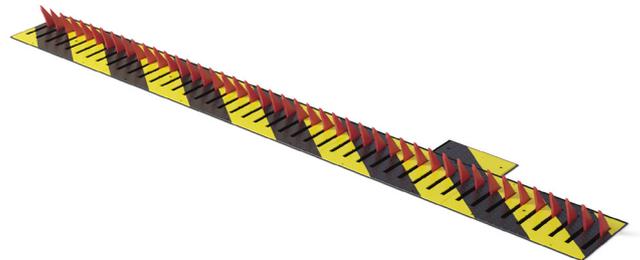

TECHNICAL SPECIFICATION

Drive system	230 V
Voltage	680 W
Operating time	2 seconds
MCBF (number of cycles)	5,000,000
MTBF (hours)	15,000 h
Paint / Finish	250° polyester powder coating
Dimensions	1 m to 5 m
Teeth (H - thickness)	210 - 20 mm
Operating temperature	-30°C + 50°C
IP components	IP54

OPTIONAL FEATURES

Customisation

- Special colour paint on RAL base

INSTALLATION

