



## THE DETERRENT BARRIER FOR SENSITIVE SITES


### BOOM BARRIER WITH AXIAL ARM UP TO 4 M



Variable speed, adjustable from 2.7 to 3.8 seconds	Continuous operation, 10,000 cycles/day	Fail safe open in the event of a power failure	<b>Robustness ensured by its axial arm clamping</b>	Cataphoresis treated steel body
--	--	--	---	------------------------------------

#### STANDARD CHARACTERISTICS

- Speed:** Variable and adjustable from 2.7 seconds
- Continuous operation:** 10,000 cycles/day
- Boom:** 135x93 mm oval axial high strength aluminium from 2 to 4 m
- Geared motor:** Three-phase / 230 V single-phase power supply
- Spring:** Compression counterbalance spring
- Housing:** Made of treated steel sheet with Ronis 405 cataphoresis lock + standard RAL 5015
- Top cover:** 2 mm aluminium sheet with RAL 9010 paint
- ONE-C control board comprising:** Power supply, PLC, frequency converter, SD card, RJ45 (Modbus)
- ONE-SENSE sensor:** Automatic motor management and control

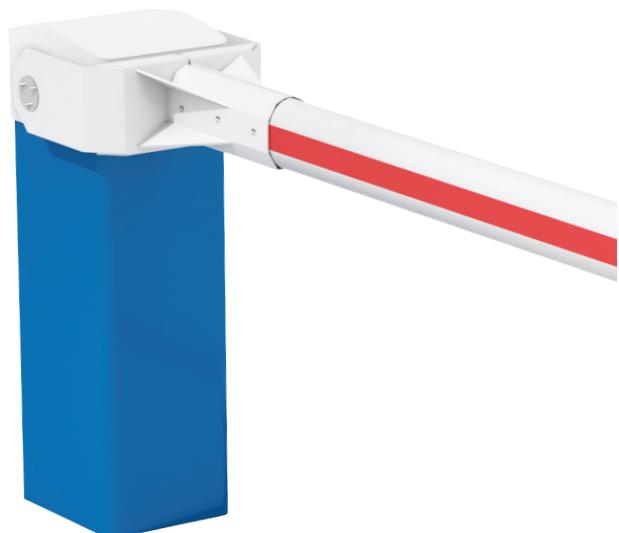


## TECHNICAL SPECIFICATION

Power supply	230 V
Consumption	0.18 kW three-phase motor
Geared motor	Reversible
Counterbalance	Compression spring + chain and sprocket
Boom	135x93 mm oval white lacquered reinforced aluminium
Operating time	From 2.7 seconds (variable depending the options and lengths chosen)
MCBF (number of cycles)	5 million
MTBF (hours)	15,000
MTTR (average time to repair)	30 minutes
Maximum boom length	4 m
Emergency operation	Fail safe open in the event of a power failure
Paint	Polyester powder
Overall dimensions (LxDxH)	600 x 600 x 800 mm
Operating temperature	-30 ° to +55 °C
IP rating	54

Boom length (m)	Passing width (m)	Weight (kg)	Tip supports
2.00	2.00	84	No
3.00	3.00	87	No
4.00	4.00	88	Yes

## INSTALLATION

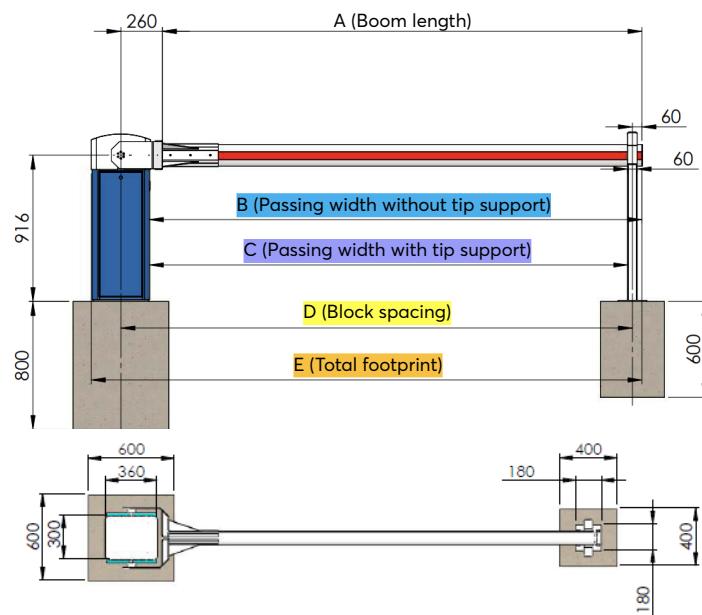

## OPTIONS

### Customisation

- Special colour polyester paint (RAL to be defined)

### Audible & visual signals

- Illuminated cover with LED strip
- Illuminated boom
- Flashing lights on post
- Flashing light on beam
- Penetration lights
- R23 red and green light on integrated post
- Standardised signage
- Siren on passage violation
- Bar with integrated LED strip
- Flashing lights on barrel
- Audible alarm in case of forced lifting
- Standardised signage

### Safety

- Infrared barrier
- Reflex cell
- Loop detector
- Single and double-direction virtual loops
- Ultrasonic detector
- Articulated arm
- Aluminium housing
- Galvanised anti-corrosion housing
- LAPI
- Firefighter box - Button box
- Manual anti-shock rotation device
- Internal anti-fraud locking (reversible)
- Programmable Cardin S 449-433 MHz 1-channel radio receiver
- Adjustable rest
- Electromagnetic locking on rest
- Adjustable tip support
- LBA connect

### Power supply:

- Ø63 mm janolene
- U-1000 RO 2V 3 x 2.5 mm<sup>2</sup> cable

### Remote control:

- Ø40 mm green janolene
- 5 pair 9/10 core telephone cable

### Arm rest connection:

- Ø30 mm tube
- Infrared cell, magnetic plunger, etc.

### Magnetic loop cable:

- Ø30 mm tube
- Twisted pair loop cable

### Sealing template + 4 mounting rods

- The template remains level in situ and must rest entirely on solid concrete
- Arm rest base plate

