



# URBICANDE slim post

W&I WILMOTTE & INDUSTRIES

## URBICANDE SLIM POST STYLISH AND WITHSTANDS THE IMPACT OF A 3.5-TONNE HGV AT 40 KM/H H 100/120 CM - Ø9 CM



Integrates into the urban landscape, protects without causing alarm

Bollard impact resistance certified through crash tests and compliant with standards

8-cm gap above Foundation for floor finish

Very low sealing depth  
<20 cm

### STANDARD CHARACTERISTICS

#### • Cylinder:

- Steel cylinder treated by zinc plating and epoxy powder Ø 9 cm - height 100/120 cm
- Adjustment pads integrated into the base for levelling

#### • Installation:

- Small post axis 20 cm from the edge of the concrete foundation or from the back of the curb
- Barrier: articulated guard rails to follow the road



MADE IN FRANCE

# URBICANDE slim post

## TECHNICAL SPECIFICATIONS

Resistance	216,000 J
Paint / Finish	RAL steel colour
Dimensions	Ø 9 - H 100 or 120 cm steel

## CERTIFICATION

Impact resistance certified by digital crash test:



### Frontal impact:

- 1.5 tonnes at 48 km/h
- 3.5 tonnes at 32 km/h

### Impact at 45°:

- 3.5 tonnes at 40 km/h

## OPTIONAL FEATURES

### Customisation

- Choice of RAL colours
- Height variant 1.20 m with contrasting head


## VERSIONS

### BARRIER




### BARRIER GUARD RAIL

Custom fill

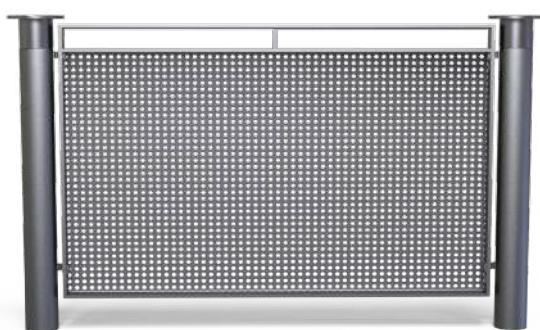

### BARRIER COMBINATIONS

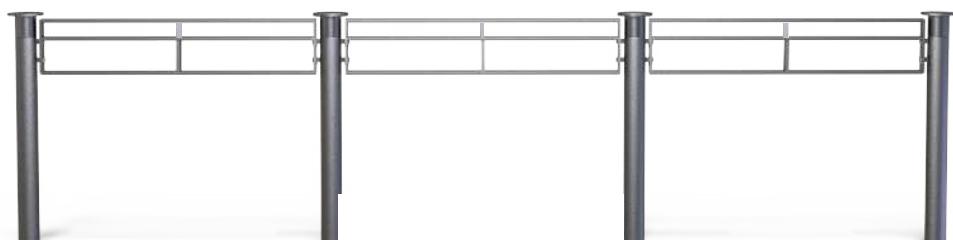

### BARRIER AND PLANTER COMBINATIONS

