


> F16-100-C50

**STATIC SECURITY BOLLARD -
WITHSTANDS THE IMPACT OF A 7.5-TONNE HGV AT 48 KM/H
H100 CM - Ø16 CM**

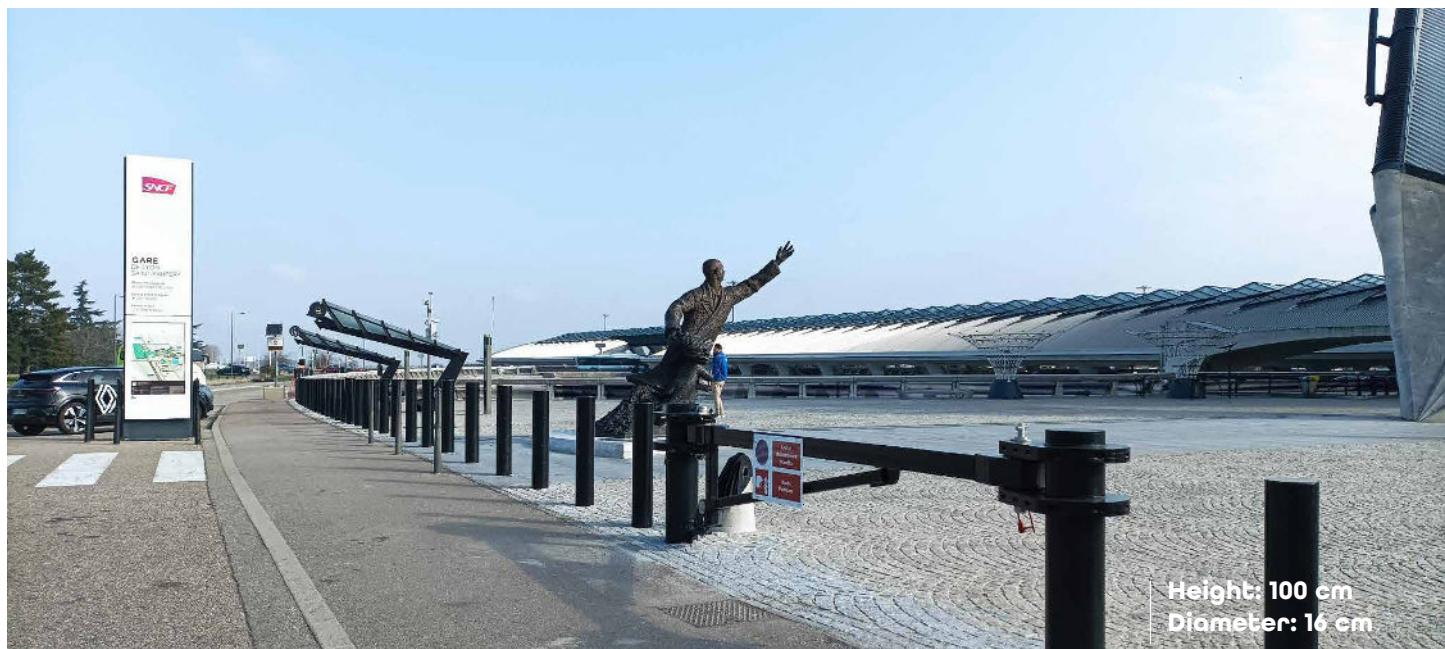

**Height: 100 cm
Diameter: 16 cm**

Interchangeable
RAL-painted steel sleeve

**8 cm gap above
Foundation for
Floor Finish**

Bollard intact after
crash test

Customisable

Resistant
and discreet

STANDARD CHARACTERISTICS

• Cylinder:

- Hot-dip galvanised steel Ø 16 cm - height 100 cm
- Fitted with an interchangeable steel shell Ø 17 cm
- RAL 7016 colour



TECHNICAL SPECIFICATION

Resistance	723,000 J
Paint / Finish	RAL 7016 steel colour
Cylinder dimensions (H-Ø)	1,000 mm / 160 mm

CERTIFICATION

Resistance certified by crash test and with bollard intact after impact:



3.5 tonnes at 48 km/h



Supplemented by a digital crash test:
7.5 tonnes at 48 km/h

tested in its shallow version

OPTIONAL FEATURES

Customisation

- Retroreflective tape
- Choice of RAL colour
- Paint with seafront treatment

INSTALLATION

